


AG2

Anti-Slip Drainage Tile

SPECIFICATION SHEET

- Provides anti-slip for weld areas and all types of environments where lubricants are present
- Holes allow liquids to easily drain or airflow through tile
- Protects against heat and chemicals with a bonded silicon carbide grit on the PVC tile's surface
- Configures easily to work environments
- Standard lug connection system allows mixing of tile type
- Provides ergonomic support
- 64 leg support structure underneath provides weight load dispersion and channels for cord control
- Can be edged with A3, 4, 5 and 6 edges

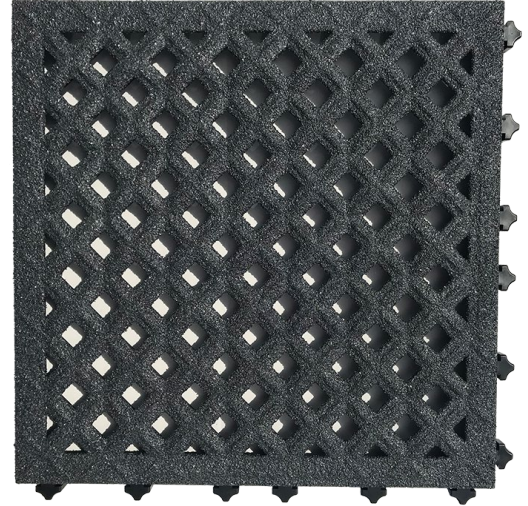

AIRFLOW	30% drainage or airflow /ft ²
DUROMETER	Shore hardness "A" 85 (+/- 5)
DIMENSIONS	18 in x 18 in x 1 in
WEIGHT	6.5 lbs
COMPOSITION	Recycled PVC tile with silicon carbide grit surface
WARRANTY	2 year warranty against manufacturer's defects
TEAR STRENGTH (ASTM D624)	303 lbs/in
TENSILE STRENGTH (ASTM D412)	Stress: 1630 PSI Strain: 150%
TABER ABRASION (SAE J1530)	Negligible Wear
FRICITION (ASTM D1894)	Static: 1.46 Dynamic: 1.35
MAX LOADING	1429 PSI
COLORS	Black, Custom colors available

