


# A1-SM

## Smooth Top Tile SPECIFICATION SHEET

- Excellent for areas requiring movement of carts
- Designed for dry areas
- Configures easily to work environments
- Standard lug connection system allows mixing of tile types
- Provides ergonomic support
- Easy to clean and maintain
- 64 leg support structure underneath provides weight load dispersion and channels for cord control
- Can be edged with A3,4,5 and 6 edges

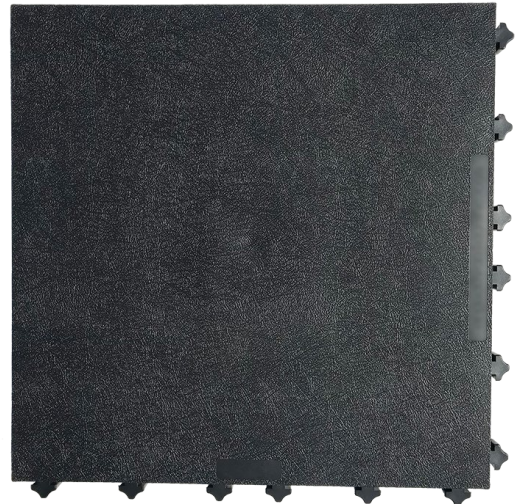

<b>DIMENSIONS</b>	18 in x 18 in x 1 in
<b>WEIGHT</b>	5.5 lbs
<b>COMPOSITION</b>	100% Recycled PVC tile
<b>TEAR STRENGTH (ASTM D624)</b>	303 lbs/in
<b>TENSILE STRENGTH (ASTM D412)</b>	Stress: 1630 PSI Strain: 150%
<b>DUROMETER</b>	Shore hardness "A" 85 (+/-5)
<b>FLAMMABILITY</b>	.61 watts/cm <sup>2</sup> = Class 1 fire resistant
<b>TABER ABRASION (SAE J1530)</b>	Negligible wear
<b>MAX LOADING</b>	1429 PSI
<b>WARRANTY</b>	Lifetime warranty against manufacturer's defects
<b>COLORS</b>	Black, Custom colors available

